

This flooring consists of variable colored planks. For BEST results, determine your color design pattern prior to installation by laying out different color planks from several cartons at a time.

Tesoro™ Uniclic™ Luxury Engineered Planks Installation Guide

PLEASE READ ALL INSTRUCTIONS PRIOR TO INSTALLATION



FIGURE 2

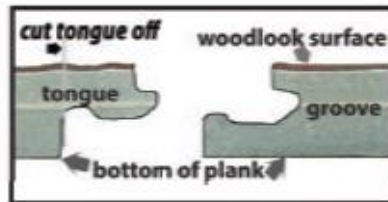


FIGURE 3



FIGURE 4

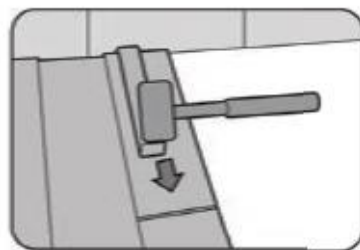


FIGURE 5A

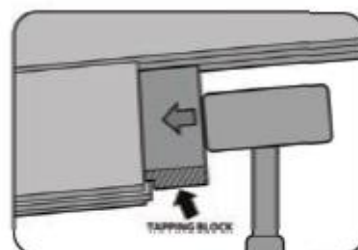


FIGURE 5B

TOOLS REQUIRED

- Utility Knife • Tape Measure • Straight Edge • 5/16" Spacers • Hammer & Tapping Block

PRIOR TO INSTALLATION

- **Tesoro™ Luxury Engineered Planks (LEP)** are high quality, SPC polymer core flooring that if maintained, will last for many years. It needs to be protected properly, as with other floor covering, such as hardwood and laminate, because it can be scratched. Scratches may be caused by pets, furniture, appliances, dirt & rocks from shoes, and many other types of abrasive items.
- Allow for 5-10% waste from installation and cut pieces.
- Carefully check flooring material for any defects. Contact your supplier immediately if any are found.
- Remove quarter round, baseboard molding or cove base.
- You can leave existing baseboards and use quarter round to cover required 5/16" perimeter gap
- Undercut doorway moldings to the thickness of the flooring, if needed.
- Always store cartons horizontally on a smooth, solid, flat, clean surface.
- Air Conditioning must be on 24 hours prior to install & maintained at range 65-85 degrees F.
- Remove all furniture and appliances from room.
- Do not stack higher than ten cartons & do not stack anything on uninstalled Tesoro™ LEP planks.
- Mix in and install planks from several different cartons during installation to insure a random appearance

- Install kitchen cabinets prior to installing Tesoro™ LEP
- Do not install base cabinets or island cabinets on top of the floor
- Avoid exposure to long periods of direct sunlight. Close blinds or drapes during peak sunlight hours.

*** Tesoro™ LEP are resistant to water damage, but do not prevent the transmission of moisture. Moisture should not be allowed to collect on either side of the vinyl flooring to prevent the growth of mold and mildew***

RECOMMENDED USE

- Residential and light commercial applications
- Interior use only in climate controlled environment
- Not for use on ramps
- Do not install planks over floors that are sloped for drainage.
- Any uneven areas in the subfloor greater than 1/8" in 6' radius should be spot-leveled with a portland based cementitious patching compound, so it is flat according to industry standards.
- UNDERLAYMENTS - Please use approved underlayments that are no thicker than 2mm

WOOD SUBSTRATES

Wood floors must be double construction with a minimum thickness of 1", free from spring / deflection. Top layer of plywood shall be 1/4" minimum thickness underlayment grade plywood. Recommended 2mm underlayments include APA Underlayment Grade Plywood A-C, B-C or C-C plugged, ACCUPLY, SurePLY, TECPLY, ULAY, C.S.A. (CanPly) and Proboard. Joist spacing should not exceed 19.2". Use nail set for fasteners exposed above surface. Fill and caulk gaps wider than 1/8" wide.

CONCRETE SUBSTRATES

Tesoro™ LEP may be installed over on grade, above grade, or below grade concrete subfloors. Concrete floors shall be constructed in accordance with the American Concrete Institute (ACI) 302.1 Guide for Concrete Floor and Slab Construction. Concrete shall be finished and cured according to ACI and have a minimum compressive strength of 3500 psi. Installation of moisture vapor barrier is recommended prior to pouring of on or below grade slabs. The concrete subfloor must be prepped according to ASTM F710 standards, so it is clean, dry, smooth, and flat. Then a moisture test throughout the jobsite must be conducted according to ASTM F2659 prior to installation. Refer to Traxem Quick Check video as an example <https://www.youtube.com/watch?v=2eTgxb6Blo0>. If moisture readings are above industry standards, additional moisture mitigation may be needed. **Before any floating floor installation, you may wish to consider using a 6 mil polyurethane moisture barrier on top of the concrete subfloor, to mitigate against any possible future, natural or unnatural, moisture issues.** Tesoro™ LEP may be installed over gypsum based underlayments. Refer to the Resilient Floor Covering Institute Website at: <http://www.rfci.com/images/pdf/rfcirecommended9-04.pdf>

EXISTING FLOORS

Tesoro™ LEP may be installed over most smooth, single layer, hard surface existing flooring (resilient, tile, ceramic, marble, and terrazzo). Existing flooring must be moisture free and in good condition. Check existing flooring for any curled areas around the perimeter or at seams and repair if necessary. Spot-Level by using a good quality cementitious based embossing leveler to smooth and fill the existing floor or grout lines. Tile may require several skim coats to achieve a flat surface.

TESORO™ LEP VINYL PLANKS DO NOT CONTAIN HAZARDOUS MATERIAL SUCH AS ASBESTOS OR CRYSTALLINE SILICA.

*****OLD, EXISTING FLOORS MAY CONTAIN THIS HAZARDOUS MATERIAL*****
*****WARNING: Do not sand, dry sweep, dry scrape, drill, saw, bead blast or mechanically chip or pulverize any existing resilient flooring, backing, lining felt, or asphaltic “cutback” adhesive. These products may contain asbestos fibers or crystalline silica. Avoid creating dust. Inhalation of such dust is a cancer and respiratory tract hazard. Smoking by individuals exposed to asbestos fibers greatly increases the risk of serious bodily harm. Unless positively certain that the existing product is a non-asbestos containing material, you must presume it contains asbestos. Regulations may require that the material be tested to determine asbestos content. Follow instructions posted in current edition of the Resilient Floor Covering Institute(RFCI) publication “Recommended Work Practices for Removal of Resilient Floor Coverings”*****

SUBSTRATE PREPARATION

- All substrates must be dry, clean, smooth, and flat, free from all existing adhesive residues, and free from movement or deflection.
- The subfloor substrate must be flat within 1/8” every 6 ft radius or 3/16” in 10 ft radius.
- Fill and level all plywood seams and concrete cracks, construction joints, control joints, depressions, grooves or other irregularities.
- Use a latex fortified, cementitious patching compound.
- Prior to installation of floor, sweep and/or vacuum substrate to remove all dust and debris.

*******PLEASE NOTE*******

TESORO™ LEP are made primarily to be a floating floor and should never be nailed to the substrate. As with any floating floor, installing with spans over 80 feet in length or 80 feet in width, without use of a transition piece, will void the warranty. TESORO™ LEP can be glued down with approved premium grade pressure-sensitive adhesives. Tesoro LEP are intended for indoor use only.

GETTING STARTED

1. Determine which direction the planks will be installed. To make the room appear larger or if installing in very small rooms or hallways, it is preferable to lay the planks parallel to the longest room dimension.
2. Do not install cabinets on top of planks.
3. Carefully measure the room to determine squareness and to determine the width of the last row of planks. If the width of the last row of planks is less than 2” (50mm), excluding the tongue, the width of first row of planks will have to be cut accordingly.
4. A minimum 5/16” (8.2mm) expansion space is required around the perimeter of the room and all vertical objects (i.e. pipes and fixtures).
5. **Inspect all Tesoro™ LEP for visible defects and damage before and during installation.** Do not install damaged planks. IWT Tesoro will not accept responsibility for claims on flooring installed with obvious defects. During installation, inspect the groove area and remove any debris that may prevent proper assembly of planks. **INSTALLATION CONSTITUTES ACCEPTANCE.**

INSTALLATION

- Begin installation parallel to the long dimension of the room, preferably parallel with the light sources (windows and doors) (see figure 1). Snap a chalk line at the starting point to maintain alignment. Mix in and install planks from several different cartons during installation to insure a random appearance
- Install planks from the left side of the starting wall and work to the right side. If starting with a full width plank, the tongue must be removed (figure 3). To trim planks, use a Utility knife and a straight edge. Score the top surface of the plank, flex it downward to separate pieces. The tongue side of the

plank always faces the starting wall. Place 5/16" (8.2mm) spacers between the short and long side of the planks and the wall. Always position one spacer between the wall and where the planks join.

- The end joints of the planks in the first row are assembled by gently overlapping the tongue side over the groove side of the previous plank. Gradually lower the plank down flat, until the end joint closes. Make sure that the planks are perfectly aligned. Install remaining full planks in the first row.
- The last plank in the first row may need to be cut. Measure the distance between the wall and the surface of the last full plank. Subtract 5/16" (8.2mm) from this measurement to allow for the spacer. If this measurement is less than 8" (20.3cm) in length, trim first plank and last plank, each no less than 8". Planks are cut using a mitre saw or sharp utility knife and straight edge or carpenter's square. Score the surface of the plank with a utility knife, and then snap the plank at the score line.
- The remaining piece cut off from the last plank in the first row may serve as the first plank in the second row provided it is at least 8" (20.3cm) long. Always stagger end joints from row to row a minimum of 8" (20.3cm) (see figure 1).
- Install the long side of the first plank of the second row. Remember to place a 5/16" (8.2mm) spacer between the wall and the short side of the plank. Insert the long tongue side into the long groove side of the previous row at a low angle and lower flat to the substrate. Tap with tapping block if needed.
- Install the second plank of the second row. Position the long side of the plank with the tongue side overlapping the groove of the planks in the previous row approximately 1/8". Then, angle the end joint into the previous plank. Angle the plank down and gently push in until the plank locks into the previous row (see Figure 2). Continue installing remaining planks in second row. It is important to make sure that the first two rows are straight and square or this will adversely affect the entire installation (figure 1)
- Continue working from left to right, row by row. Be sure to maintain a 5/16" space around all walls and vertical objects and maintain a random appearance. Offset end joints a minimum of 8" (20.3cm).
- Tesoro™ LEP planks are glueless so they can also be installed with a pull bar or tapping block and hammer in difficult areas, such as the last row, and when fitting around door trim. Use a pull bar and hammer to lock the joints together in the last row. Always use a pull bar on the cut edge of the plank. Factory edges can be damaged if the pull bar is used directly against them (figure 5 A and B).
- When fitting around door trim it will be necessary to slide the plank under the trim. This can be accomplished easily by starting the row on the side of the room with the door trim and then sliding the plank into place once it is attached. The row can be completed by inserting the tongue in to the groove or the groove into the tongue depending on the direction. A special Uniclic™ approved tapping block and pullbar can also be used to lock the joints together while the planks are in a flat position. Use a series of light taps until the joint is gradually locked together (figure 5A and 5B).

FINISHING THE INSTALLATION

- After all planks have been installed, remove spacers from perimeter of room.
- Install transition moldings. Do not fasten any moldings through the flooring.
- Pre-drill and install quarter round or baseboard molding. Molding must be sufficient size to cover the 5/16" (8.2mm) space. Do not fasten moldings through the flooring. Fasten into the wall.
- Cover exposed edges against all vertical surfaces w moldings, 100% silicone caulking is optional.
- Use plywood to cover the top of the flooring when moving heavy furniture or appliances into position.
- Use proper floor protectors under the legs of furniture.
- Post installation temperature must be maintained between 65° and 85°F. Relative humidity must be maintained between 40% and 70%.

BATHROOMS

When the Tesoro™ LEP are installed in a bathroom, the flooring can be glued down & laid under the toilet, only if the floor is separated from adjacent rooms with a doorway threshold. Otherwise the floating flooring should be installed around the toilet leaving a 5/16" expansion space. Use a high quality

100% silicone caulking to fill the expansion space at the tub, shower and all wet areas to prevent surface water seepage under the floor.

STAIRS

Tesoro™ LEP planks can be installed fully adhered over steps using a high quality pressure sensitive luxury vinyl tile adhesive. Follow the instructions on the adhesive for trowel size and drying time. Always use a flush stair nose molding to finish each step at the nose. Use Landing Stair Tread on Landing Stairs.

FINISHING THE JOB

Remove all spacers. Install wall trim lightly over the floor surface. Drive fasteners into the wall and not the floor. When installing transitions or moldings, do not interfere with the free movement of the floating flooring – allowing for minimum of 5/16” expansion everywhere - do not squeeze flooring with transitions or wall base – allow 1/16” gap above floor. Do not drive fasteners into the floor. Return appliances to the room by rolling or sliding over a good floor protector, to prevent damaging the floor.

FLOOR CARE

- Frequently moved furniture should be equipped with felt pads to avoid scratching the floor. Do not drag or slide heavy furniture and appliances. All heavy objects should be equipped with non-staining large surface floor protectors. Furniture with castors or wheels must be easy swiveling, large surface non-staining and suitable for resilient floors. Do not use ball type castors as they can damage the floor.
- Do not use wheel chairs on the floor, especially mechanized wheel chairs.
- All rolling furniture or chairs MUST have a protective floor pad under the chair at all times.
- Use walk off mats at entrances to prevent dirt and grit from being tracked on to the floor.
- Make sure pets have nails clipped regularly.
- Sweep or vacuum the floor regularly to remove loose dirt using soft bristle attachments. Avoid using a vacuum with a beater bar.
- Clean up spills and excessive liquids immediately.
- Damp mop as needed using clean water and a diluted vinyl floor cleaner recommended for no-wax vinyl floors. We recommend the BONA™ line of products. Do not use harsh cleaners, chemicals, bleach, or wax to maintain the floor.
- Avoid exposure to long periods of direct sunlight. Close blinds or drapes during peak sunlight hours

Tesoro™ is a trademark of International Wholesale Tile LLC (IWT) .
LEP is a marketing name covering all of IWT's LVP Rigid Core series
Unilin™ and Uniclic™ are names licensed under Unilin Flooring, LLC.

For further information, visit our website @ <http://www.internationalwholesaletile.com/>

Follow all directions & take care of your new beautiful floor so you will enjoy it for years to come!

Important!

Before Starting

Before starting , it is highly recommended that you open 2-3 cartons and install a mix of planks from each different production run on your floor. This will result in a more natural looking floor.

INSTALLATION CONSTITUTES ACCEPTANCE – so inspect all material carefully before installing it.

This document was updated 6/1/22.